

Laney

Concept CT10 Enclosure

Technical Specification

Frequency Response	100 - 20KHz
Power Rating	80W Continuous 160W Program
Drivers	Reflex Loaded 10" bass driver & tweeter
Sensitivity	97dB/W@1M
Connectors	Two ¼ inch jack sockets
Weight	10.5kg
Dimensions	470 x 310 x 330mm
Impedance	8 Ohms
Accessories	Tri-pod Stand ,Pole stand for use with CS enclosures
Spares	41007 bass driver, 10512 tweeter



Description

CT Loudspeakers are compact full range enclosures designed for a variety of applications such as sound reinforcement for bands, places of worship, health clubs, discotheques and DJ's.

All CT enclosures feature custom low frequency drivers and a piezo type tweeter in an optimized reflex enclosure. They are the results from extensive measurements and listening tests using a variety of live and pre-recorded material.

The CT ranges compact size, light weight and rugged carpet covered design make them perfect for mobile use.


A recess handle is provided in the rear for easy transport.

Loudspeaker connection is provided by two ¼ inch Jacks. This allows an input and a link out facility to additional cabinets.

Where additional bass extension is required the CS low frequency enclosures can be added. The CS115 is an ideal partner for any of the CT range. This can be done simply by driving into the CS115 and taking the link out from the CS115 to the CT cabinets input.

A 35mm top hat is provided in the base of the loudspeaker for easy stand mounting or pole mounting above a CS loudspeaker.

The additional bass extension of a CS115 can be seen in the graph below.

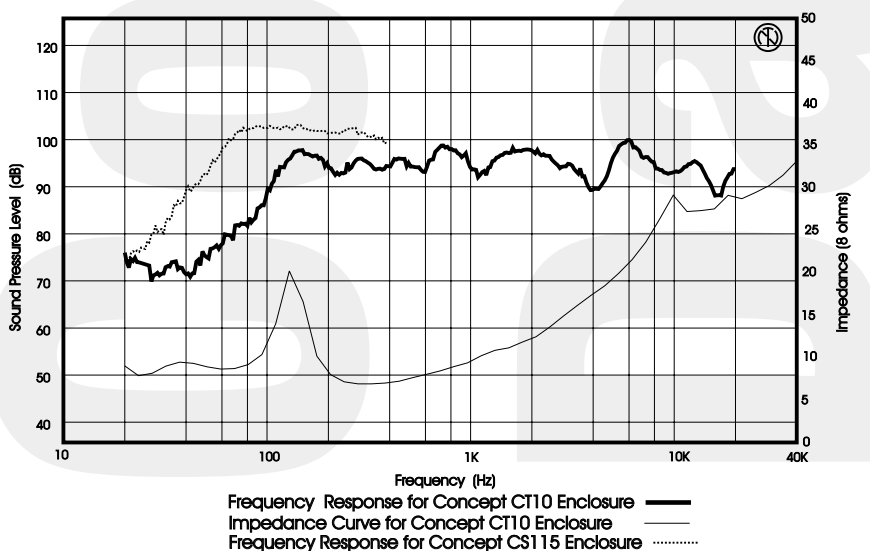

Laney

Concept CT12 Enclosure

Technical Specification

Frequency Response	85 - 18KHz
Power Rating	100W Continuous 200W Program
Drivers	Reflex Loaded 12" bass driver & dual horn with built in protection
Sensitivity	98dB/W@1M
Connectors	Two ¼ inch jack sockets
Weight	15kg
Dimensions	545 x 384 x 397mm
Impedance	8 Ohms
Accessories	Tri-pod Stand ,Pole stand for use with CS enclosures
Spares	41227 bass driver, 10514 tweeter



Description

CT Loudspeakers are compact full range enclosures designed for applications such as sound reinforcement for bands, places of worship, nightclubs, discotheques and DJ's.

All CT enclosures feature custom low frequency drivers and a piezo type tweeter in an optimized reflex enclosure. They are the results from extensive measurements and listening tests using a variety of live and pre-recorded material.

The CT ranges compact size, light weight and rugged carpet covered design make them perfect for mobile use.


A recess handle is provided in the rear for easy transport.

Loudspeaker connection is provided by two ¼ inch Jacks. This allows an input and a link out facility to additional cabinets.

Where additional bass extension is required the CS low frequency enclosures can be added. The CS115 is an ideal partner for any of the CT range. This can be done simply by driving into the CS115 and taking the link out from the CS115 to the CT cabinets input.

A 35mm top hat is provided in the base of the loudspeaker for easy stand mounting or pole mounting above a CS loudspeaker.

The additional bass extension of a CS115 can be seen in the graph below.

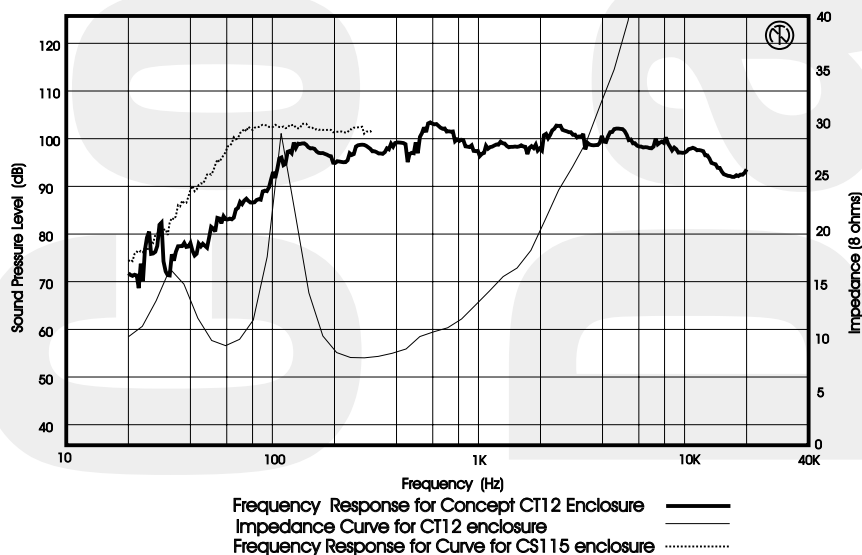

Laney

Concept CT15 Enclosure

Technical Specification

Frequency Response	65Hz - 18KHz
Power Rating	150W Continuous 300W Program
Drivers	Reflex Loaded 15" bass driver & dual driver high frequency horn
Sensitivity	98dB/W@1M
Connectors	Two ¼ inch jack sockets
Weight	20kg
Dimensions	637 x 444 x 463mm
Impedance	8 Ohms
Accessories	Tri-pod ,Pole stand for
Spares	Use with CS enclosures 41521 bass driver , 10514 tweeter



Description

CT Loudspeakers are compact full range enclosures designed for a variety of applications such as sound reinforcement for bands, places of worship, health clubs, discotheques and DJ's.

All CT enclosures feature custom low frequency drivers and a piezo type tweeter in an optimized reflex enclosure. They are the results from extensive measurements and listening tests using a variety of live and pre-recorded material.

The CT ranges compact size, light weight and rugged carpet covered design make them perfect for mobile use.


A recess handle is provided in the rear for easy transport.

Loudspeaker connection is provided by two ¼ inch Jacks. This allows an input and a link out facility to additional cabinets.

Where additional bass extension is required the CS low frequency enclosures can be added. The CS115 is an ideal partner for any of the CT range. This can be done simply by driving into the CS115 and taking the link out from the CS115 to the CT cabinets input.

A 35mm top hat is provided in the base of the loudspeaker for easy stand mounting or pole mounting above a CS loudspeaker.

The additional bass extension of a CS115 can be seen in the graph below.

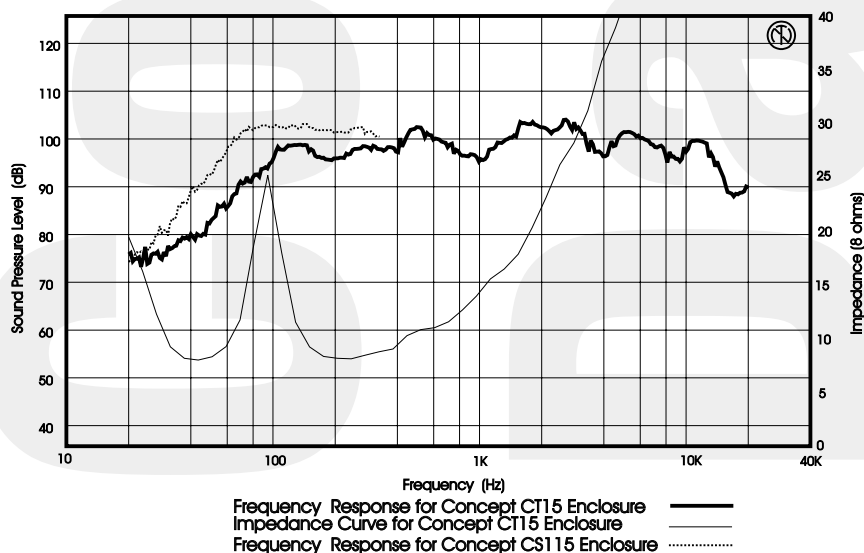

Laney

Concept CT815 Enclosure

Technical Specification

Frequency Response	65Hz - 18KHz
Power Rating	250W Continuous 500W Program
Drivers	Reflex Loaded 15" bass driver, sealed 8" mid driver & dual driver high frequency horn
Sensitivity	99dB/W@1M
Connectors	Two ¼ inch jack sockets
Weight	24Kg
Dimensions	715 x 444 x 463mm
Impedance	8 Ohms
Accessories	Tri-pod stand ,Pole stand use With CS enclosures.
Spares	41504 bass driver ,40801 mid driver , 10514 tweeter



Description

CT Loudspeakers are compact full range enclosures designed for a variety of applications such as sound reinforcement for bands, places of worship, health clubs, discotheques and DJ's.

All CT enclosures feature custom low frequency drivers and a piezo type tweeter in an optimized reflex enclosure. They are the results from extensive measurements and listening tests using a variety of live and pre-recorded material.

The CT ranges compact size, light weight and rugged carpet covered design make them perfect for mobile use.

A recess handle is provided in the rear for easy transport.

Loudspeaker connection is provided by two ¼ inch Jacks. This allows an input and a link out facility to additional cabinets.

Where additional bass extension is required the CS low frequency enclosures can be added. The CS115 is an ideal partner for any of the CT range. This can be done simply by driving into the CS115 and taking the link out from the CS115 to the CT cabinets input.

A 35mm top hat is provided in the base of the loudspeaker for easy stand mounting or pole mounting above a CS loudspeaker.

The additional bass extension of a CS115 can be seen in the graph below.

